


HKS simply click XL 14 mm, oak

Type/Construction	1 strip plank in 2 layer construction, approx. 3 mm oak toplayer, based on plywood, WBP glued
Dimensions	14/3 x 220 mm
Lengths	random lengths 400 – 2.200 mm (system-packed to length of 2.200 mm) 5 layers per bundle, 4 full length, 1 broken layer
Packaging	shrinking foil, HKS simply click XL carton, maintenance and installing instruction included 1 bundle = $2,42 \text{ m}^2$, 1 Pal. = $36 \text{ bundles} = 87,12 \text{ m}^2$
Profile	Unilin click system (drop-down), 4 sides bevel (GO4)
Finishes	natural UV oiled, invisible look hardwaxoiled, black smoke structured, deep brushed, stained, hardwaxoiled) vintage cream (structured, deep brushed, stained, natural hardwaxoiled) vintage invisible (structured, deep brushed, stained, invisible hardwaxoiled) vintage castle (structured, smoked, sawned, hardwaxoiled)
Production	according EN 13489
Grading*	Rustic (E)*, according to the describtion of the factory This grading allows the following characteristics: - midsized and big knots, filled if needed - sapwood, filled cracks, small end cracks - vivid wood structure+colour, light/dark discolouration
Installation	Glueing down on concrete or floating installation on Elastilon. Always according to the instructions of the manufacturer (e.g. adhesive, underlay, glue).
Maintenance	depending on use with suitable maintenance products
Underfloor heating	only with warm water system, no electric heating systems, surface temperature max. 29° C with equal heating heat conductivity 0,17 W(m k); thermal resistance 0,082 m ² K/W
Fire resistance	D _{ff} -s1
Labelling	CE
Hints	wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore, an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

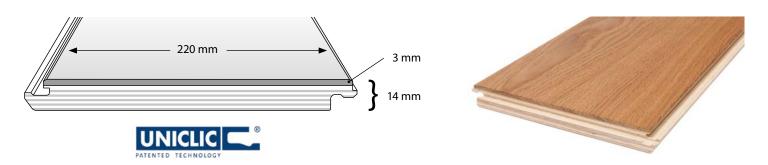

^{*}according to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.