


HKS Krügers 21 mm, oak

Type/Construction	1 strip plank in 2 layer construction, approx. 4 mm top layer oak on birch plywood, WBP glued
Dimensions	21/6 x 140 / 160 / 180 / 200 / 220 / 240 / 280 mm
Lengths	random lengths 600 – 2.000 / 2.400 / 2.600 / 2.800 mm; system-packaging; 3 – 5 layers per bundle
Packaging	shrinking foil, end cap, maintenance and installing instructions included
Profile	all around tongue and groove, longside beveled (GO2)
Surfaces	Pure, Milk, Sugar, Macchiato, Honey, Caramel, Crema, Cacao, Original, Natural, Almond, Nougat, Vanille, Coco
Production	according to EN 13489
Grading*	According to the quality description of the manufacturer. Inside this grades it is allowed: ABCD grade: sound knots, filled knots, smaller cracks, filled cracks in the surface, rarely cracks in the filler, vivid structure, natural differences in colour, sapwood up to ¼ of the width, other wood typical characteristics. AB grade: sound knots up to 10 mm, filled knots up to 3 mm, minor hairline cracks, natural differences in colour.
Installation	glueing down on concrete or floating installation on Elastilon; always according to the instructions of the manufacturer (glue, Elastilon, etc.)
Maintenance	depending on use with suitable maintenance products
Underfloor heating	suitable up to 240 mm width, only warm water system, no electric heating systems, surface temperature max. 29° C with equal heating, heat conductivity 0,17 W (m k); thermal resistance 0,124 m ² K/W
Fire resistance	D _{fl} -s1
Labelling	CE; A+; FSC on request
Hints	Wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

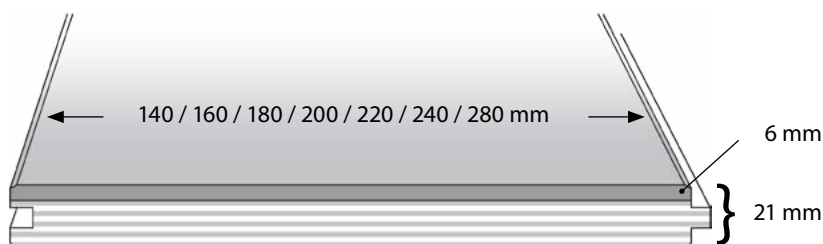

*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.