


## HKS manufaktur deluxe, Herringbone and Chevron

<b>Type/Construction</b>	Herringbone 90° / Chevron 45° + 60° in 2-layer construction, approx. 4 mm europ. oak toplayer, based on birch plywood, WBP glued
<b>Dimensions</b>	standard sizes 15/4 x 100 x 600 mm + 15/4 x 120 x 700 mm + 15/4 x 140 x 800 mm
<b>Packaging</b>	left and right strips in one box shrinking foil, leaflet for maintenance and installation instruction included
<b>Profile</b>	tongue and groove all around, 4 sides bevel (GO4)
<b>Surfaces</b>	22 colours according to the catalogue, bespoke finishes on request
<b>Production</b>	according to EN 13489
<b>Grading*</b>	<b>AB grade</b> <b>ABCD grade</b> - each grading according to the description of the manufacturer
<b>Installation</b>	glueing down on concrete, using a suitable parquet adhesive - always mind the description of the manufacturer
<b>Maintenance</b>	depending on use, with suitable maintenance products only
<b>Underfloor heating</b>	only on warm water based system, no electric heating systems, surface temperature max. 29° C with equal heating 15 mm: thermal conductivity 0,17 W(m K); thermal insulation resistance 0,088 m <sup>2</sup> K/W
<b>Fire resistance</b>	Dfl-s1
<b>Labelling</b>	CE
<b>Hints</b>	Manufaktur deluxe is a custom made production. Every plank is unique. Every lot is individual. Colour differences to samples may occur. It highlights the distinctive characteristics and the authenticity of the floor. Please including enough cutting scrap, especially for installation of Herringbone and Chevron. Differences of +5% of the ordered amount need to be accepted.

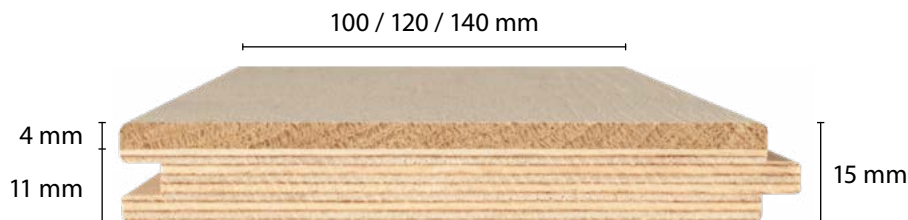

\*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.