


HKS twinface 16 mm, Oak

Type/Construction	plankwood flooring, approx. 4 mm top layer, based on finger-jointed solid oak
Dimensions	16/4 x 100 mm / 120 mm / 140 mm
Lengths	random lengths 500 – 1.200 mm or 600 – 2.400 mm (systempackage); 6 pieces per box
Packaging	shrinking foil, HKS carton, maintenance and installing instructions included
Profile	all around tongue and groove, beveled (GO4)
Surfaces	unfinished, natural oiled, white oiled; smoked or brushed
Production	according to EN 13489
Grading*	ABC - according to the quality description of the manufacturer. To be expected: sound knots, filled knots, smaller cracks, filled cracks in the surface, rarely cracks in the filler, vivid structure, natural differences in colour, sapwood up to ¼ of the width, other wood typical marks.
Installation	glueing down on concrete or floating installation on Elastilon
Maintenance	depending on use with suitable maintenance products
Underfloor heating	only warm water system, no electric heating systems, surface temperature max. 25° C with equal heating, heat conductivity 0,17 W (m k); thermal resistance 0,094 m ² K/W
Fire resistance	Dfl-s1
Labelling	CE
Hints	Wooden floorings are a natural product, due to climate conditions joints can occur in winter and the planks can swell in summer. Therefore an expansion gap to the walls of min. 15 mm is necessary. According to the behaviour of the planks the customer must be advised.

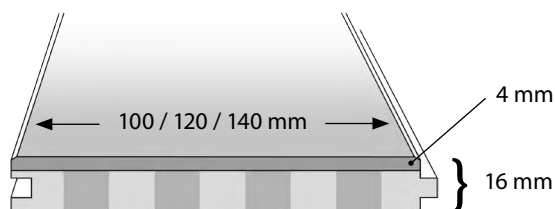

*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.